

# C1608C0G2E151K080AA

TDK Item Description : C1608C0G2E151KT\*\*\*\*



## Application & Main Feature

Commercial Grade ( Mid Voltage (100 to 630V) )

## Series

C1608 [EIA CC0603]



## Dimensions

L 1.60mm +/-0.1mm  
W 0.80mm +/-0.1mm  
T 0.80mm +/-0.1mm  
B 0.20mm Min.  
G 0.30mm Min.

## Temperature Characteristic

C0G (-55 to 125 degC 0+/-30ppm/degC)

## Rated Voltage

2E (250Vdc)

## Capacitance

150pF

## Capacitance Tolerance

K (+/-10%)

## Q Factor

1000 Min.


## Insulation Resistance

10Gohm Min.

## AEC-Q200

Not Applicable


### |Z|, ESR vs. Freq. Characteristics

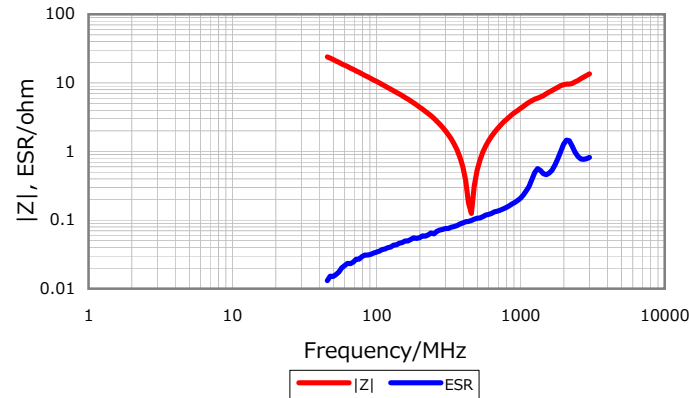

### DC Bias Characteristic



### Cap. vs. Freq. Characteristic

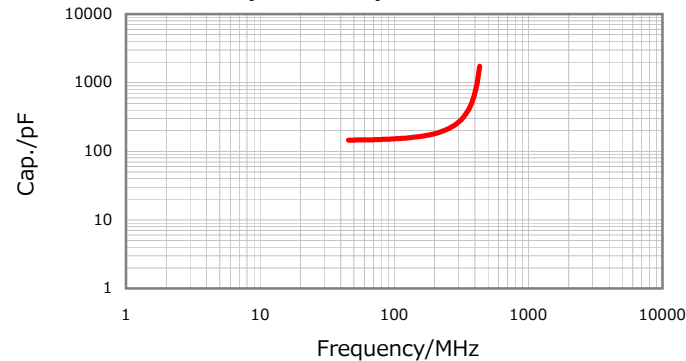

### Temperature Characteristics



Characterization Sheet ( Multilayer Ceramic Chip Capacitors )



⚠ All specifications are subject to change without notice.

January 3, 2016