

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [1715653002](#)  
**Status:** **Active**  
**Overview:** [zQSFP+ and QSFP+ Integrated Product Solutions](#)  
**Description:** zQuad Small Form Factor Pluggable Plus (zQSFP+) Stacked Integrated 2-by-3 Connector and Cage with Elastomeric Gasket, Gold (Au) Over Nickel Plated, Up/Down Light Pipe

**Documents:**

<a href="#">Drawing (PDF)</a>	<a href="#">Packaging Specification PK-171565-0001-001 (PDF)</a>
<a href="#">3D Model</a>	<a href="#">Test Summary TS-171565-0001-001 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">Symbol Footprint Data SYM-171565-3001-001 (PDF)</a>
<a href="#">Product Specification PS-171565-0001-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Application Specification AS-171565-0002-001 (PDF)</a>	<a href="#">Product Literature (PDF)</a>

**Agency Certification**


UL E29179

**General**

Product Family	I/O Connectors
Series	<a href="#">171565</a>
Application	Board-to-Board, Module-to-Board, Wire-to-Board
Component Type	Receptacle
Electrical Model	Yes
Overview	<a href="#">zQSFP+ and QSFP+ Integrated Product Solutions</a>
Product Name	zQSFP Plus, zQSFP+
Type	N/A
UPC	887191264363

**Physical**

Circuits (Loaded)	228
Circuits (maximum)	228
Color - Resin	Black
Durability (mating cycles max)	100
Flammability	94V-0
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Matte Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	96.028/g
Number of Rows	2
Orientation	Right Angle
PC Tail Length	1.20mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.57mm
Packaging Type	Tray
Panel Mount	N/A
Pitch - Mating Interface	0.80mm
Plating min - Mating	0.762µm
Plating min - Termination	0.762µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	6
Temperature Range - Operating	-40° to +85°C
Termination Interface: Style	Through Hole - Compliant Pin

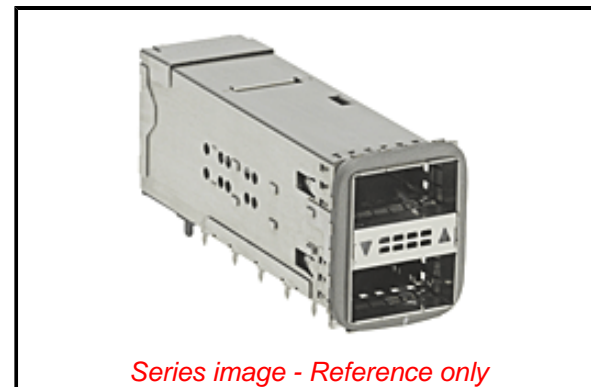

*Series image - Reference only*

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Not Contained Per -  
D(2020)9139-DC (19  
Jan 2021)

**Halogen-Free**

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[171565 Series](#)

**Mates With**

[74757](#) , [111040](#) QSFP+ Cable Assemblies,  
[74763](#) QSFP+ Loopback Adapter, [111114](#)  
zQSFP+ Cable

**Electrical**

Current - Maximum per Contact	0.5A
Grounding to Panel	Yes
Voltage - Maximum	30V AC (RMS)/DC

**Solder Process Data**

Lead-free Process Capability	N/A
------------------------------	-----

**Material Info****Reference - Drawing Numbers**

Application Specification	AS-171565-0002-001
Electrical Model Document	EE-171081-3000-001
Packaging Specification	PK-171565-0001-001
Product Specification	PS-171565-0001-001
S-Parameter Model	SP-171081-3000-001
Sales Drawing	SD-171565-2000-001
Symbol/Footprint Data	SYM-171565-3001-001
Test Summary	TS-171565-0001-001

This document was generated on 08/30/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**